Maximum Average Pressure (MAP)* = 55,000 psi
Crusher pressures not established.
* Refer to ANSI/SAAMI Z299.4 for pressure guideline interpretation description.

Instrumental Velocity*: 145-gr @ 2,250 fps
(* Velocity based on a 16" Test Barrel)

ISSUED: 01/21/2019 **350 LEGEND [350 LGND]** **REVISED: 04/09/2019**

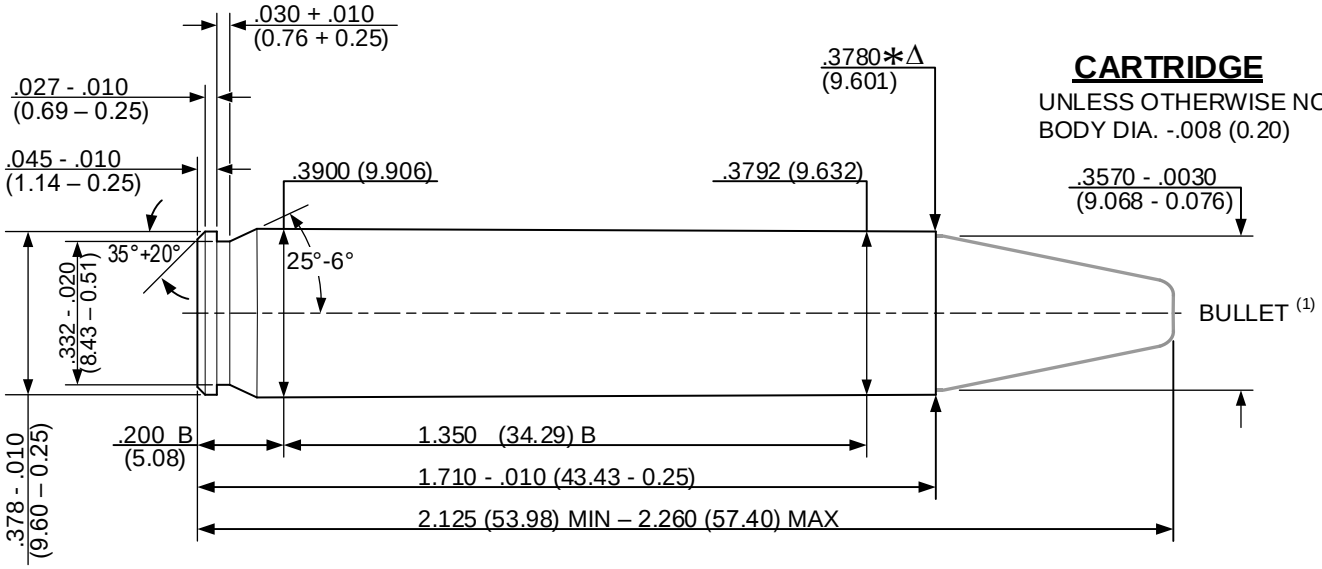

CARTRIDGE
UNLESS OTHERWISE NOTED
BODY DIA. -.008 (0.20)

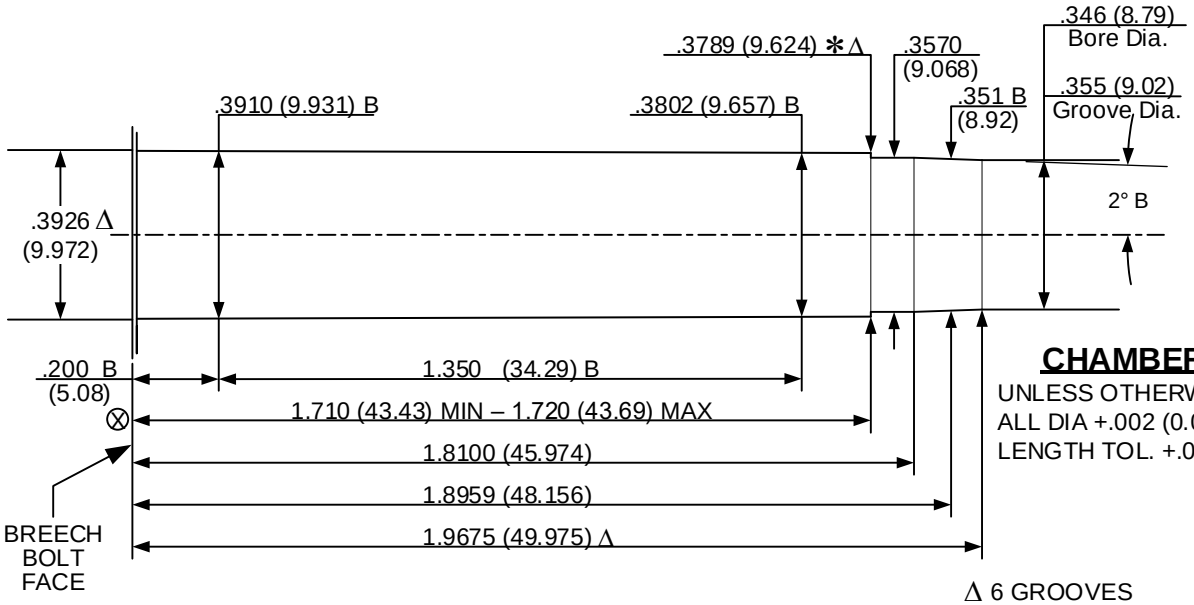

CHAMBER
UNLESS OTHERWISE NOTED
ALL DIA +.002 (0.05)
LENGTH TOL. +.015 (0.38)

Δ 6 GROOVES
Δ .100+.002 [2.54+0.05] WIDE
TWIST: 16.00 [406.4] R.H. OPTIONAL
MIN. BORE & GROOVE AREA:
.0967 SQ. IN. [62.387 mm²]

DO NOT SCALE FROM DRAWING

NOTE:
B = BASIC
(XX.XX) = MILLIMETERS
⊗ = HEADSPACE DIMENSION
Δ = REFERENCE DIMENSION
∗ = DIMENSIONS ARE TO INTERSECTION OF LINES
ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)
(1) – BULLET PROFILE IS SHOWN FOR ILLUSTRATIVE PURPOSES ONLY

Copyright © Sporting Arms and Ammunition Manufacturers' Institute, Inc. All rights reserved. No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher